



PCT/GB 2004 / 0 0 4 5 2 5

GB04/04525



INVESTOR IN PEOPLE

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

REC'D 03 DEC 2004

WIPO

PCT

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed *Andrew*

Dated 2 November 2004


**PRIORITY  
DOCUMENT**

SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

**BEST AVAILABLE COPY**

# The Patent Office

06NOV03 ES498342 001034  
P01/7700 0.00-0525868.8

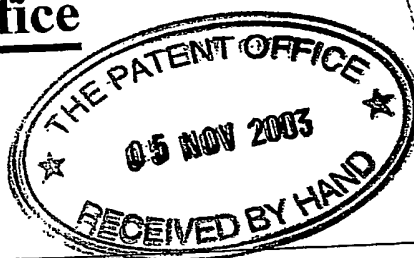

The Patent Office

Cardiff Road  
Newport  
South Wales  
NP10 8QQ

## Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

1. Your reference

P513079GB/DCJ/70545

2. Patent application number

(The Patent Office will fill in this part)

05 NOV 2003

0325868.8

3. Full name, address and postcode of the or of each applicant (underline all surnames)

Tyco Electronics Brazil S.A.  
Rua Ado Benatti 53  
Lapa  
Sao Paulo  
CEP 05037-010  
Brazil

Patents ADP number (if you know it)

08738502001

If the applicant is a corporate body, give the country/state of its incorporation

Brazil

4. Title of the invention

Electrical Interconnection Arrangement

5. Name of your agent (if you have one)

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

WITHERS & ROGERS  
Goldings House  
2 Hays Lane  
London  
SE1 2HW

Patents ADP number (if you know it)

1776001

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or each of these earlier applications and (if you know it) the or each application number

Country

Priority application number  
(if you know it)

Date of filing  
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing  
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:  
a) any applicant named in part 3 is not an inventor, or  
b) there is an inventor who is not named as an applicant, or  
c) any named applicant is a corporate body.  
See note (d))

YES

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description	9
Claim(s)	3
Abstract	1
Drawing (s)	12

212 g

10. If you are also filing any of the following, state how many against each item.

Priority documents	-
Translations of priority documents	-
Statement of inventorship and right to grant of a patent (Patents Form 7/77)	-
Request for preliminary examination and search (Patents Form 9/77)	1
Request for substantive examination (Patents Form 10/77)	-
Any other documents (please specify)	-

11.

I/We request the grant of a patent on the basis of this application.

Signature

Date

WITHERS & ROGERS

WITHERS & ROGERS

5th November 2003

12. Name and daytime telephone number of person to contact in the United Kingdom

D Colin Jones

+44 (0)20 7663 3500

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least six weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

P513079GB

# Electrical Interconnection Arrangement

This invention relates to an electrical interconnection arrangement, which finds particular, though not exclusive, application in providing connection to a busbar.

It is known, for example, from Brazilian Patent Number P19706273, to provide for the electrical connection of a plurality of cables, for example, branch or tap cables, to a single feeder cable, using a busbar mounted in an insulating housing. In this patent, an array of metal support plates is slidably mounted, under the reaction of return springs, within a plastics housing. The support plates are apertured, and can be raised against the action of the springs by a screwdriver such that the apertures are aligned with respective inlet apertures of the housing so that conductors of the cables can be passed thereinto and secured in place in contact with a common busbar retained within the housing.

In accordance with one aspect of the present invention, there is provided a switchable electrical interconnection arrangement comprising:

- a busbar mounted in an electrically insulating housing;
- means for electrically connecting a feeder cable to the busbar within the housing;
- at least one connecting means mounted in the housing for making electrical connection to a respective branch cable that is receivable within the housing; and
- a switching arrangement mounted within the housing for selectively making electrical connection between the or each branch cable and the busbar, the switching arrangement comprising a switch moveable between an ON and an OFF position whereby a cam is rotatably driven so as to make and break electrical contact between an associated branch cable and the busbar.

In accordance with another aspect of the present invention, there is provided switchable electrical interconnection arrangement comprising:

an electrically insulating housing having a first electrical conductor secured therein and an apertured chamber for receiving a second electrical conductor;

5 wherein the chamber contains:

(a) a resiliently-biased support plate having an aperture that is alignable with the chamber aperture for receiving the second electrical conductor;

(b) an electrically-insulating cable holder having first and second interconnecting channels therein for receiving said first and second electrical conductors respectively;

10 and being arranged to receive the support plate slidably mounted therewithin: and

(c) a switching member that is movable between ON and OFF positions in which electrical contact is made and broken respectively between the first and second electrical conductors;

wherein the support plate is movable by an external force from a first position, against  
15 its resilient biasing, so as to slide within the cable holder to a stop position therewith such that further movement causes both the support plate and the cable support to move within the insulating housing thereby substantially to bring into alignment the apertures of the support plate and the housing to permit introduction of the second electrical conductor into the second channel of the cable holder within the housing;

20 wherein removal of the external force allows the support plate to move back to a second position, under the action of the resilient biasing, thereby to retain the second conductor within the second channel of the cable support; and

wherein the switching member is movable between its OFF position in which the cable holder is retained spaced apart from the first electrical conductor, and its ON position

Thus, the electrical interconnection arrangement of the present invention is switchable such that even with the second conductor mechanically secured within the housing, electrical connection with the first conductor can be controlled by the switching member.

Although the switchable electrical interconnection arrangement of the present invention finds application to connect a single insertable second conductor with the retained first conductor of the housing, it finds especial application when the housing has a plurality of associated support plates, cable holders and switching members, whereby one, two or more second electrical conductors may be selectively brought into electrical connection with the first electrical conductor, in the form of an elongate busbar.

Advantageously, a camming arrangement interconnects the or each switching member with its associated cable holder, and these components may be mounted on a common support shaft. Rotation of the cammed switching member can then be arranged to produce reversible sliding movement of the cable holder to make and break electrical connection between the first and second electrical conductors.

In a preferred embodiment, the housing is provided with a pair of busbars to enhance the electrical connection with the one or more second electrical conductors.

Thus, in accordance with the present invention, branch or tap cables, i.e. the second conductors, may be introduced or removed selectively from the arrangement, without interference with any of the other second conductors, and this can be done whilst electrical connection to the first electrical conductor is interrupted for the selected tap cable whilst maintaining electrical connection to other branch cables.

The insulating housing may be made of a plastics or polymeric material. The housing may be constructed so as to have a total of ten cable ports for each electrical phase. One of the ports may be arranged to receive a feeder cable, whilst the remaining nine ports may be used for branching tap cables. Another option is to include two separately insulated electrical phases in the same arrangement, in which two ports will receive different feeder cables while the eight remaining ports will be divided into two groups of four to provide for up to four branching tap cables for each of the feeder cables.

The switching ability of the present electrical interconnection arrangement thus facilitates the selective connection and disconnection of tap cables without removing them physically.

A switchable electrical interconnection arrangement in accordance with the present invention, will now be described, by way of example, with reference to the accompanying drawings in which:

- Figure 1 is a perspective view of a switchable busbar arrangement;
- Figure 2 is an exploded view showing components of the arrangement of Figure 1;
- Figure 3 is a partial cut away view of the arrangement of Figure 1;
- Figure 4 is a front view of part of the arrangement of Figure 1 in the ON position;
- Figure 5 is a perspective view corresponding to Figure 4;
- Figure 6 is a front view of the arrangement of Figure 4 in an OFF position;
- Figure 7 is a section along the line A-A of Figure 1, showing one of the connection points in the OFF position;

FIG. 1

FIG. 2

FIG. 3

FIG. 4

FIG. 5

FIG. 6

FIG. 7

Figure 1 shows a ten port switchable busbar interconnection arrangement 2 that has an insulating polymeric housing 4 that is arranged to receive a single feeder cable (not shown) at an end port 6, and that has provision for receiving up to nine branching tap cables (not shown) in respective ones of identical tap ports 8, which are electrically insulated from each other.

Referring to Figures 1 and 2a, the housing 4 is of a substantially rectangular configuration that is divided into ten cable-receiving chambers 10 with dividing walls 12 projecting therefrom. The walls 12 have longitudinally-aligned apertures 14 through which an upper support shaft 16 passes for mounting components of the arrangement as hereinafter described.

Two conductive, copper, bars 18 (Figure 2b) are secured longitudinally within the plastic housing 4 and extend through each of the chambers 10, as can be seen in Figures 7 and 8. The bars 18 comprise the busbars of the arrangement 2.

As can be seen from Figures 1 and 2a, each chamber 10 of the housing 4 has an aperture 20 in the side wall thereof for receiving the stripped end of an electrical cable.

Since each of the tap ports 8 and associated chambers 10 separated by a pair of dividing walls 12 are identical, the following description will be made in respect of a single set of these components.

Referring to Figures 3 and 2c, a short shaft 22, extending transversely to the conductive bars 18, is located in the housing 4 at the lower end of the chamber 10, and serves to retain the lower end 24 of a tension spring 26, whose upper end 28 engages the aperture 29 of a support plate 30, the plane of which lies substantially parallel to the aperture 20 of the chamber 10. Although as shown in Figure 2c, the upper end of the support plate



20 is bent over to form a hook 32, a preferred embodiment of the support plate is shown at 34 in Figure 2d, which instead has an aperture 36 at its upper end beyond a pair of shoulders 37, beyond its aperture 38.

5 A cable holder 40, shown in detail in Figure 2e, is slidably mounted within the chamber 10 and has a generally U-shaped upper channel 42 that can be aligned with the support plate aperture 38 and the housing aperture 20 for receipt of an electric cable 43 transversely therein (see Figures 7 and 8). The cable holder 40 also has a pair of downwardly-extending lower channels 44 for receiving respective ones of the busbars 10 18 of the arrangement 2 (see Figures 7 and 8). A dividing wall 46 that extends longitudinally of the housing 4, is slotted at 47 to receive the support plate 34 slidably therewithin. The upwardly-extending side walls of the cable holder 40 have respective oval apertures 48, by means of which the cable holder 40 is mounted on the longitudinally-extending upper shaft 16 of the housing 2 as hereinafter described. The 15 facing inner surfaces of the cable holder 40 adjacent the apertures 48 are each provided with a pair of stops 50, 52 for the purpose discussed below.

The final component within each chamber 10 of the arrangement 2 is a switching member 54 (shown in detail in Figure 2f) that has a pair of spaced apart limbs 56 at one 20 end that are apertured so as rotatably to mount the member 54 on the upper housing shaft 16. A cam 58 extends outwardly from each of the limbs 56 for engagement within the apertures 48 of the cable holder 40.

As mentioned above with reference to Figure 1, the left hand portion of the arrangement

device 60 and is connected to an inner pressure plate 68. With the connection device 60 retained within the insulating housing 4, a feeder cable can be introduced through the feeder port aperture 20, so as to extend through the body 62, wherein it is tightened by means of the screw 66 and pressure plate 68 against the spring 64. After the connection is made, the screw 66 may be covered by a protective insulating cap 67. The device 60 is located transversely in the housing 4 between the busbars 18, and this tightening action not only secures the feeder cable within the device 60, but also ensures good electrical contact, against the returning action of the spring 64, of the feeder cable onto the pair of spaced apart busbars 18.

10

Figure 2h shows a modification of the feeder cable connection device 60, wherein the resilience for retaining the cable is provided by flexibility of the body of the device 70.

In operation of the switchable electrical interconnection arrangement, a feeder electric cable is stripped of its insulation at one end, and the bare conductor is inserted into the aperture 20 of the port 6 so as to pass through the body 62 of the connecting device 60. The screw 66 is tightened up to its shear point, thereby ensuring good electrical connection between the feeder cable and the pair of busbars 18.

Whilst a branching tap cable may be connected into its aperture 20 of the tap port 8 with its switching member 54 in the ON or OFF position, connection is preferred, for safety reasons, to be made with it in the OFF position, abutting the stops 52 of the cable holder 40. In this position, as shown in Figures 6 and 7, the cams 58 of the switching member 54, which extend into the apertures 48 of the cable holder 40, have raised the cable holder 40 such that the upper shoulders thereof project above the upper surfaces of the projections 12, and the branch cable channel 42 is in a raised position. The support plate 34 may then be raised, by means of its aperture 36, for example by levering a screwdriver over the top of the housing 4 above the aperture 20, against the

resistance of the spring 26, so as to dispose the support plate aperture 38 in alignment with the housing aperture 20 and with the channel 46. In this position, the stripped end of a tap cable conductor 43 can be inserted so as to lie along the channel 46 of the cable holder 40. Release of the screwdriver then allows the support plate 34 to return  
 5 downwards under the action of the spring 26 until the tap conductor 43 in the channel 42 is urged against the cable holder dividing wall 46 (see Figure 7). Thus, in this position the tap cable is mechanically securely retained within the housing 4 and is electrically separated from the busbars 18.

10 In order to make electrical connection between the branch cable and the busbars 18, and thus with the feeder cable, the switching member 54 is moved over from the OFF position shown in Figure 7, to the ON position shown in Figure 8, abutting the stops 50 of the cable holder 40. Owing to the eccentric mounting of the cams 58 within the oval apertures 48 of the cable holder 40, this movement allows the support plate spring 26 to  
 15 pull both the support plate 34 and the cable holder 40 downwardly in the tap chamber 10, and to bring the branch cable 43 lying in the channel 42 of the cable holder 40 down into contact with the pair of busbars 18, which are now sitting within the channels 44 and straddled by the cable holder 40. It will be appreciated, that the upper surface of the dividing wall 46 of the cable holder 40 lies below the bottom of the channels 44  
 20 thereof, to allow this interengagement, which is enhanced by the return force of the support plate spring 26, which is still under tension.

It will be appreciated that by reversing the movement of the switching member 54, the cable holder 40, owing to the movement of the cams 58 within the holder apertures 48

It will also be appreciated, that each of the nine tap ports 8 may be operated independently of each other, so that appropriate ones of the branch cables 43 may be introduced or removed, and connected or disconnected, independently of the others.

- 5 Figure 9 shows a modified switching arrangement 70, in which ten chambers of the housing 72 are divided into two groups 74, 74a of five chambers each. Each group 74, 74a can receive one feeder cable, for example of different phases, in a respective end port 76, 76a and can accommodate up to four branch cables in the remaining ports. The ports and other components of the arrangement 70 may be substantially as described.
- 10 above for the feeder and branch ports respectively of the arrangement 2. It will be appreciated that the busbars of the arrangement 70 will be approximately half the length of the busbars 18 of the arrangement 2, since they will be serving respective groups 74, 74a of the housing chambers, and will be insulated from each other.
- 15 It will be appreciated that fewer or more than eight branch ports may be provided by the switchable electrical interconnection arrangement of the invention.

# Claims

1. A switchable electrical interconnection arrangement comprising:

a busbar mounted in an electrically insulating housing;

5 means for electrically connecting a feeder cable to the busbar within the housing;  
at least one connecting means mounted in the housing for making electrical connection  
to a respective branch cable that is receivable within the housing; and

a switching arrangement mounted within the housing for selectively making electrical  
connection between the or each branch cable and the busbar, the switching arrangement  
10 comprising a switch moveable between an ON and an OFF position whereby a cam is  
rotatably driven so as to make and break electrical contact between an associated  
branch cable and the busbar.

2. Switchable electrical interconnection arrangement comprising:

15 an electrically insulating housing having a first electrical conductor secured therein and  
an apertured chamber for receiving a second electrical conductor;  
wherein the chamber contains:

(a) a resiliently-biased support plate having an aperture that is alignable with the  
chamber aperture for receiving the second electrical conductor;

20 (b) an electrically-insulating cable holder having first and second interconnecting  
channels therein for receiving said first and second electrical conductors respectively,  
and being arranged to receive the support plate slidably mounted therewithin: and

(c) a switching member that is movable between ON and OFF positions in which  
electrical contact is made and broken respectively between the first and second

within the insulating housing thereby substantially to bring into alignment the apertures of the support plate and the housing to permit introduction of the second electrical conductor into the second channel of the cable holder within the housing;

5 wherein removal of the external force allows the support plate to move back to a second position, under the action of the resilient biasing, thereby to retain the second conductor within the second channel of the cable support; and

wherein the switching member is movable between its OFF position in which the cable holder is retained spaced apart from the first electrical conductor, and its ON position in which the support plate and the cable holder are moved, under the restoring force of  
10 the resilient biasing, to a third position in which the second channel of the cable holder encompasses the second electrical conductor, thereby effecting electrical connection between the first and second electrical conductors.

3. An arrangement according to claim 2, wherein the cable holder and the  
15 switching member

(a) are mounted on a common support shaft, about which the switching member is rotatable, and

(b) interengage with one another by a cam arrangement, thereby to make and break electrical contact between the first and second electrical conductors.

20 4. An arrangement according to claim 3, wherein the cam arrangement comprises a cam that is mounted externally on the switching member and that engages within an aperture of the cable holder.

25 5. An arrangement according to any one of claims 2 to 4 comprising a plurality of said chambers.

6. An arrangement according to any one of claims 2 to 5, comprising a plurality of first electrical conductors and wherein each cable holder comprises a corresponding plurality of second channels.

5 7. An arrangement according to any one of claims 2 to 6, comprising means for connecting an electrical power supply cable to the or each first electrical conductor.

8. An arrangement according to any one of claims 2 to 7, wherein the or each first electrical conductor comprises an elongate busbar.

10

9. A switchable electrical interconnection arrangement substantially as hereinbefore described with reference to the accompanying drawings.

**ABSTRACT****Electrical Interconnection Arrangement**

5 An electrical busbar arrangement has provision for connecting a single feeder cable to a plurality of branch cables within an insulating housing. A branch port is provided for each branch cable, and a spring-loaded slidable support plate is arranged to receive the branch cable and to retain it in an aperture thereof. The support plate moves within a  
10 cable holder that is driven by a rotatable cam by means of a switch. Operation of the switch between OFF and ON positions is effective to move the branch cable into and out of contact respectively with the busbar. The switches of each port are selectively operable independently of each other. In this way, branch cables may be independently and selectively mounted in the housing and brought into electrical connection with and  
15 disconnected from the busbar.

(Figure 1)



1/12

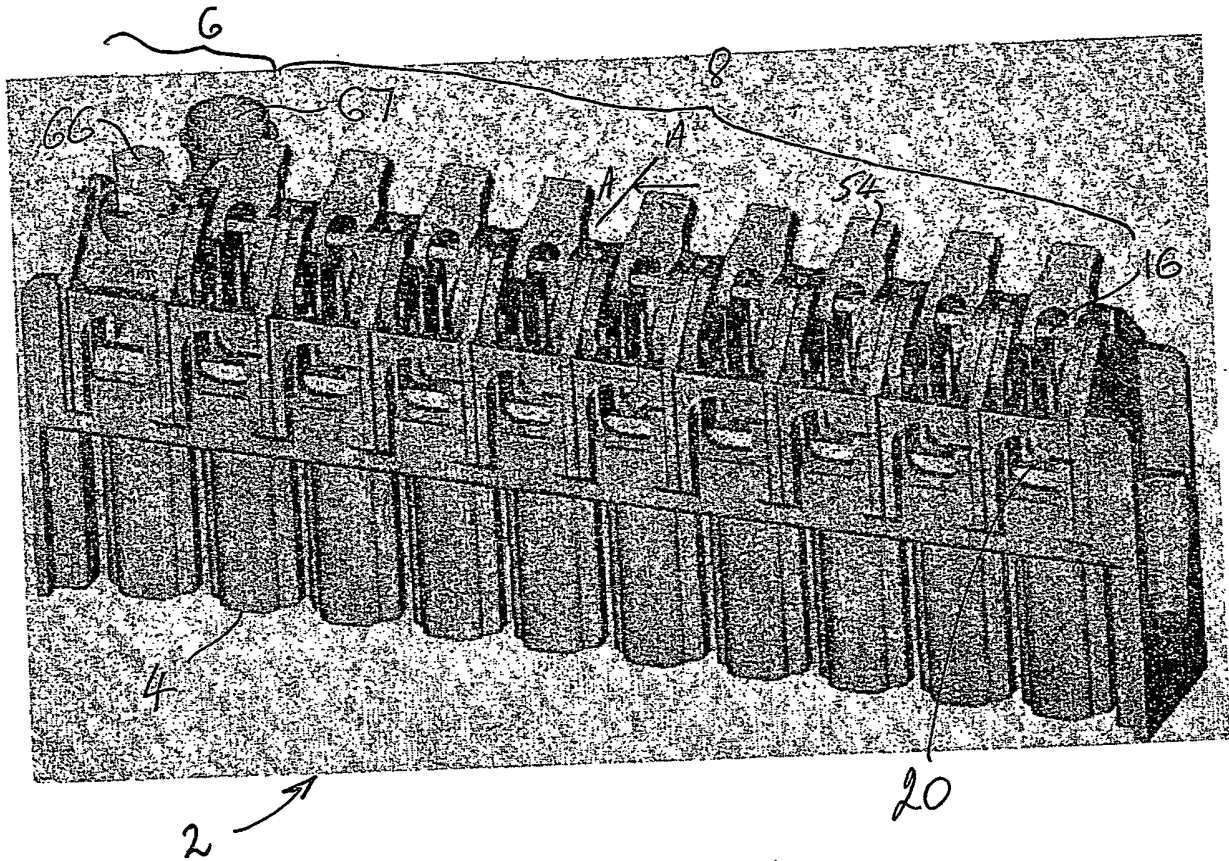


Figure 1

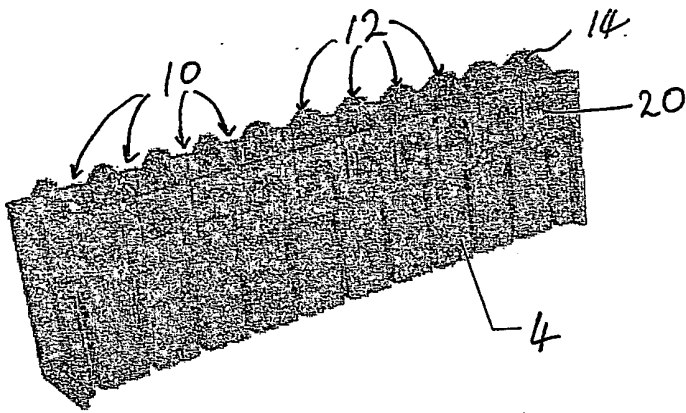


Figure 2a

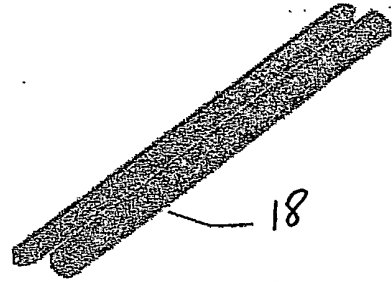


Figure 2b

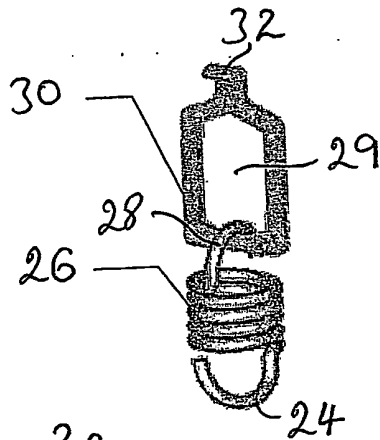


Figure 2c

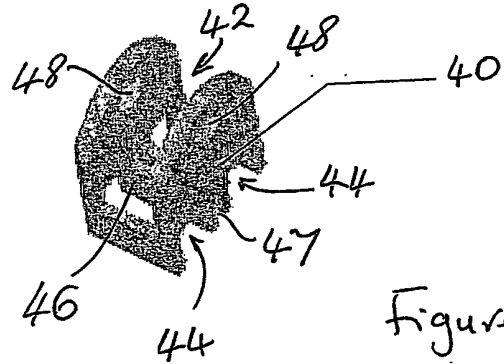


Figure 2e

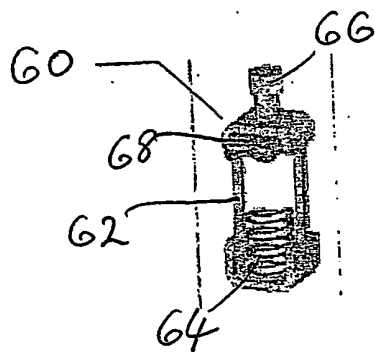


Figure 2g




Figure 2h

3/12

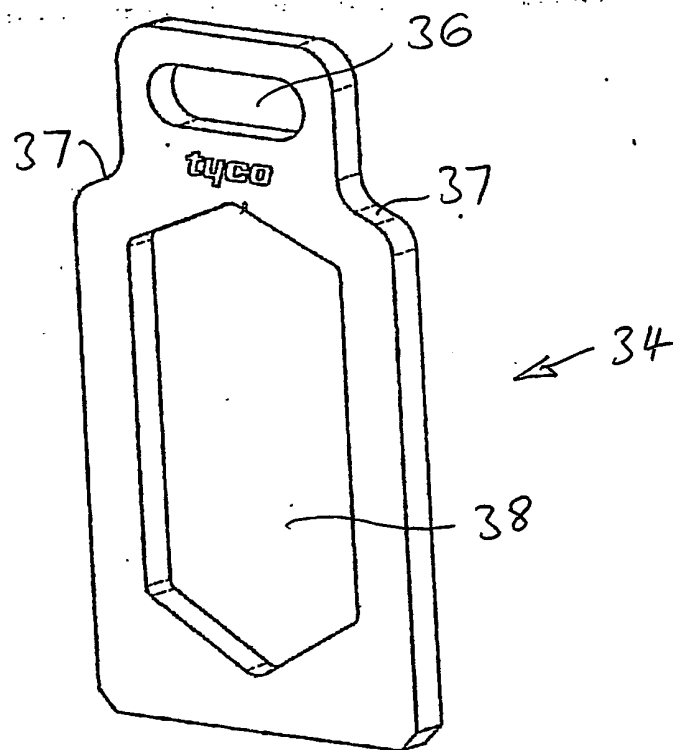


Figure 2d

4/12

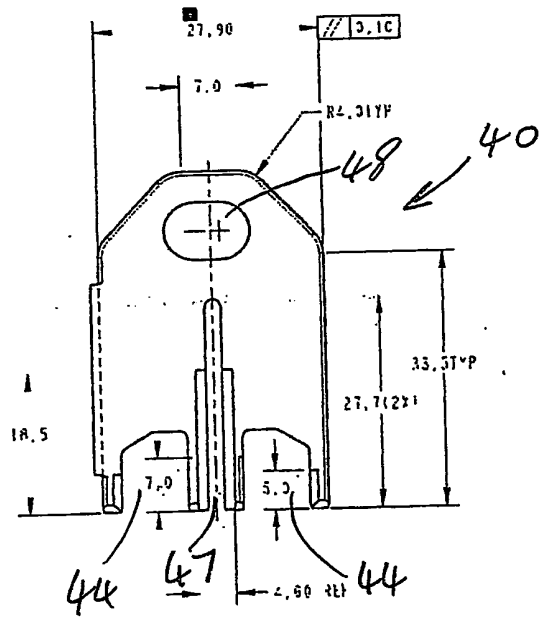


Figure 2e

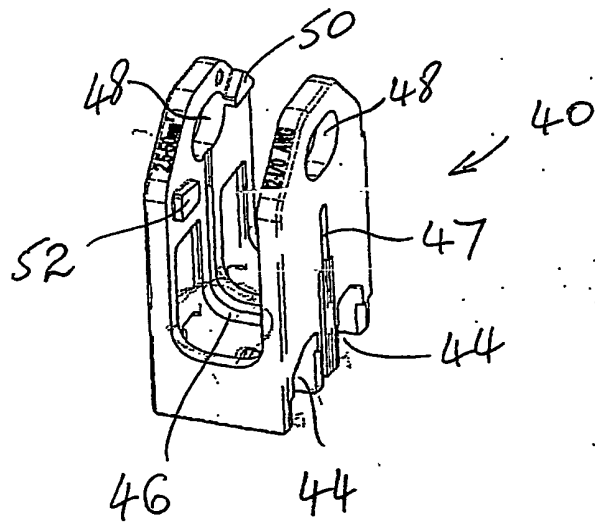


Figure 2f

6/12

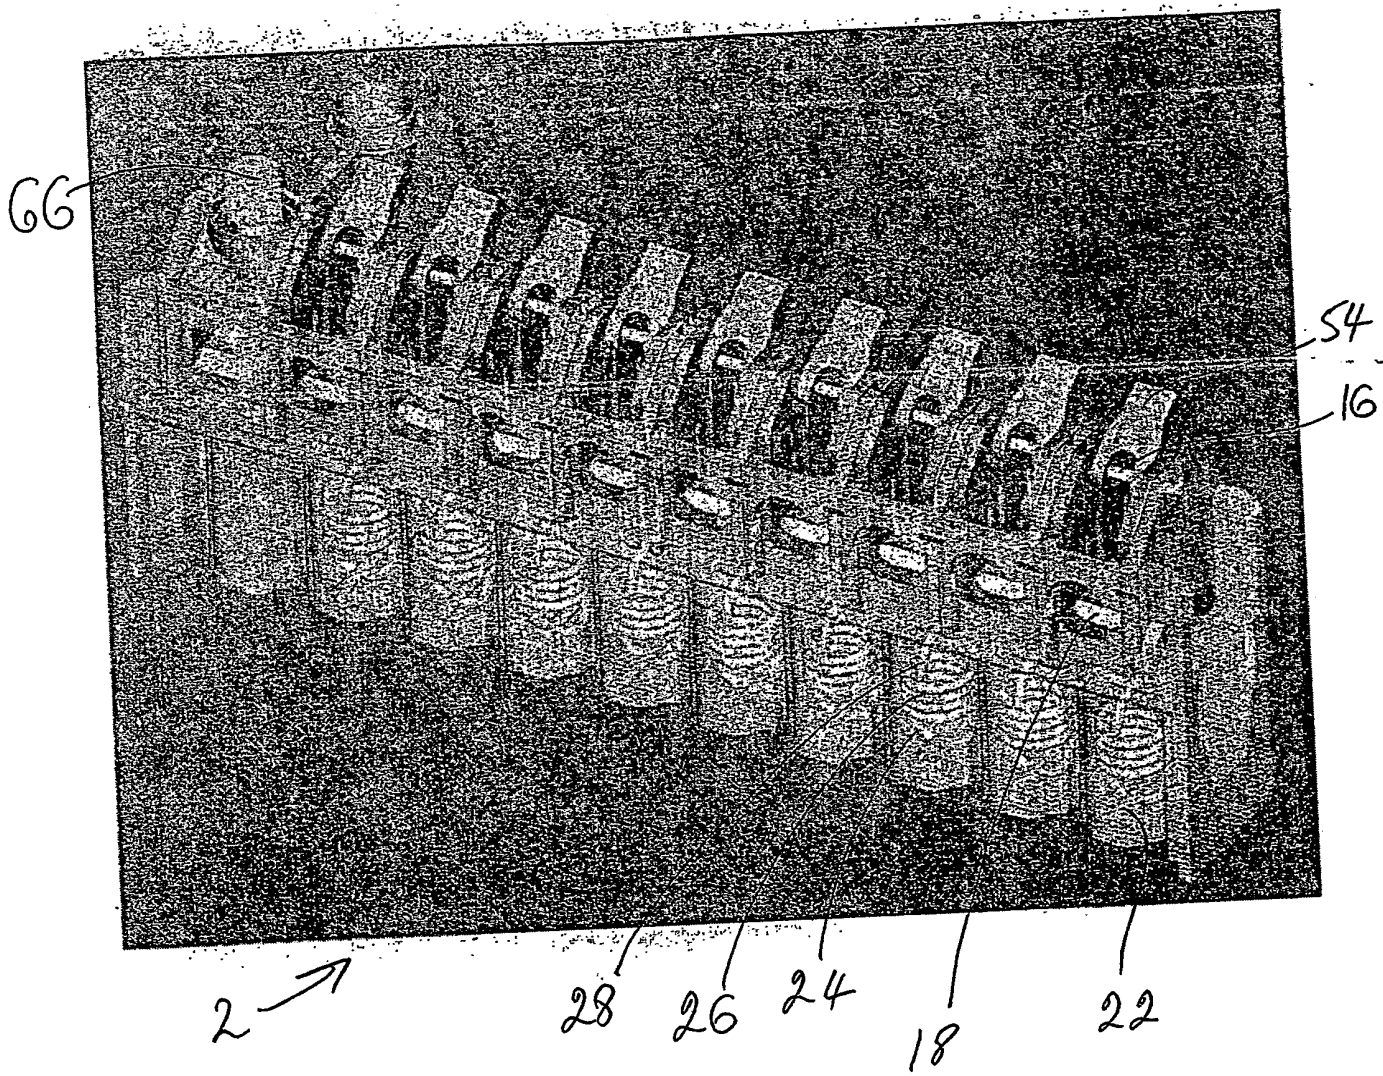


Figure 3

7/12

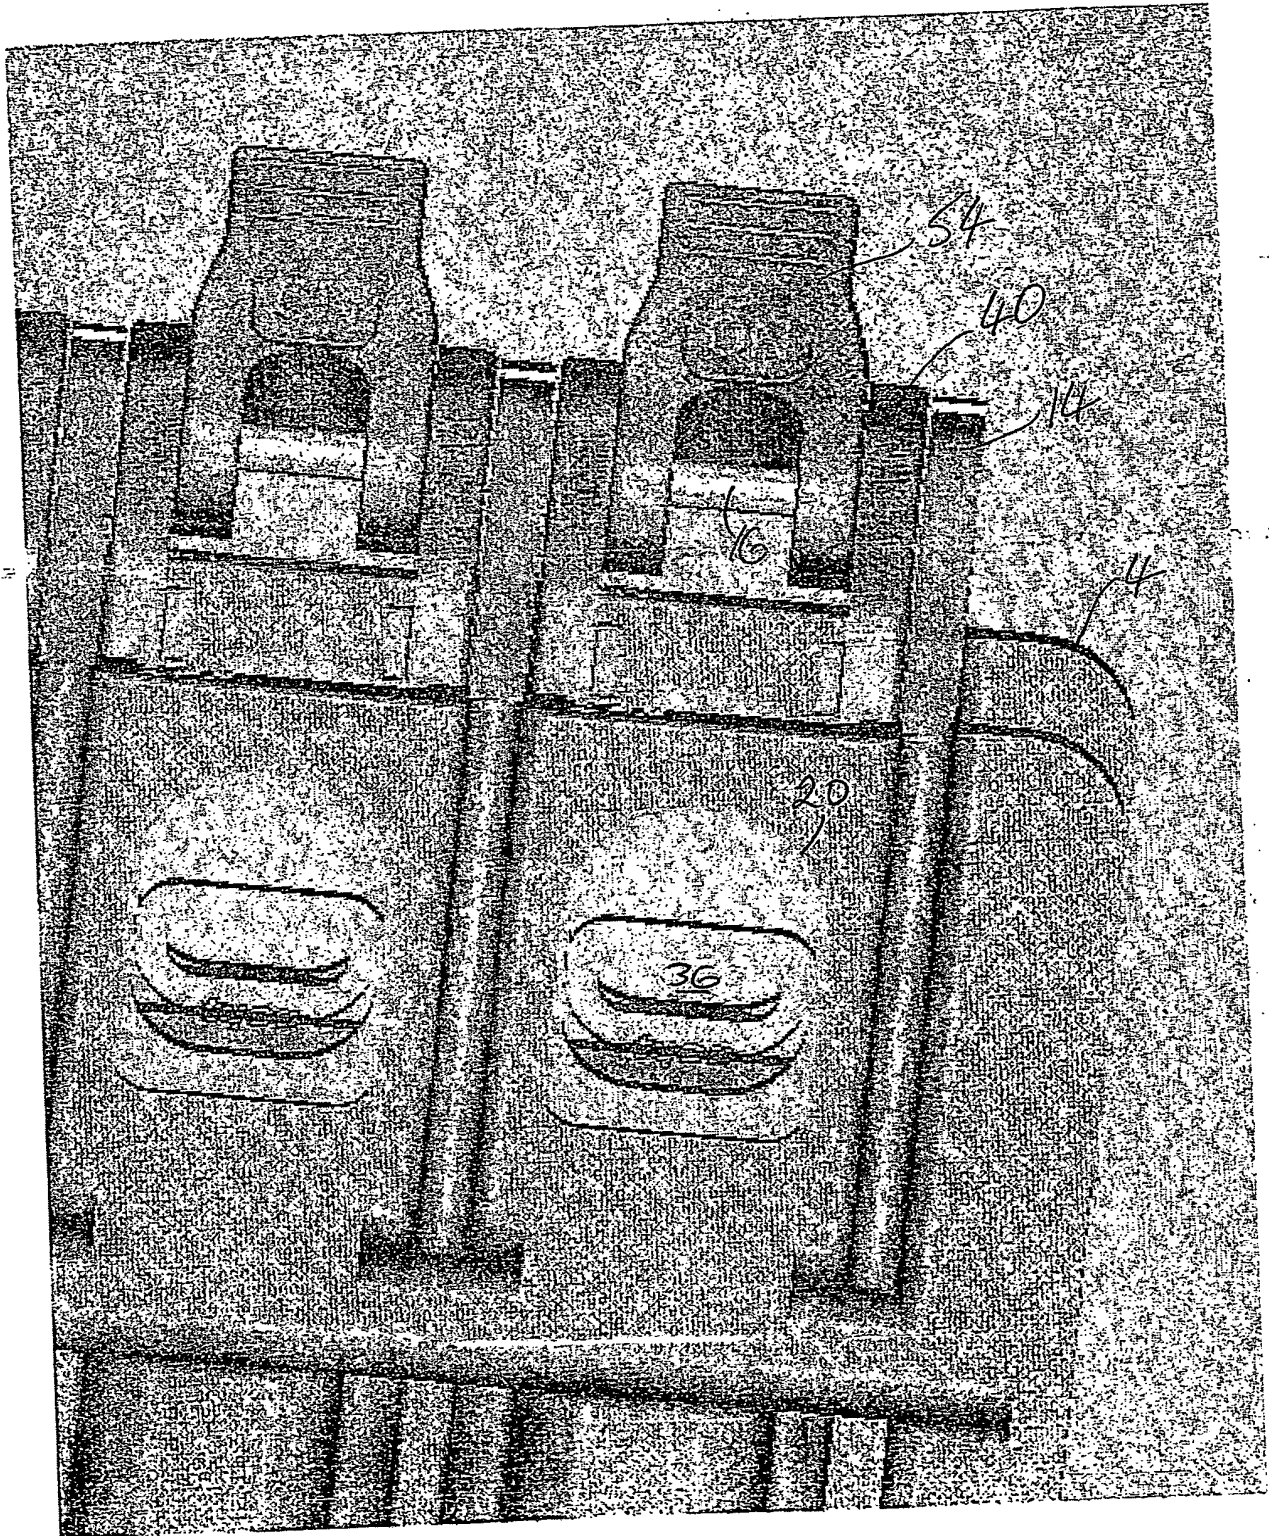


Figure 4



8/12

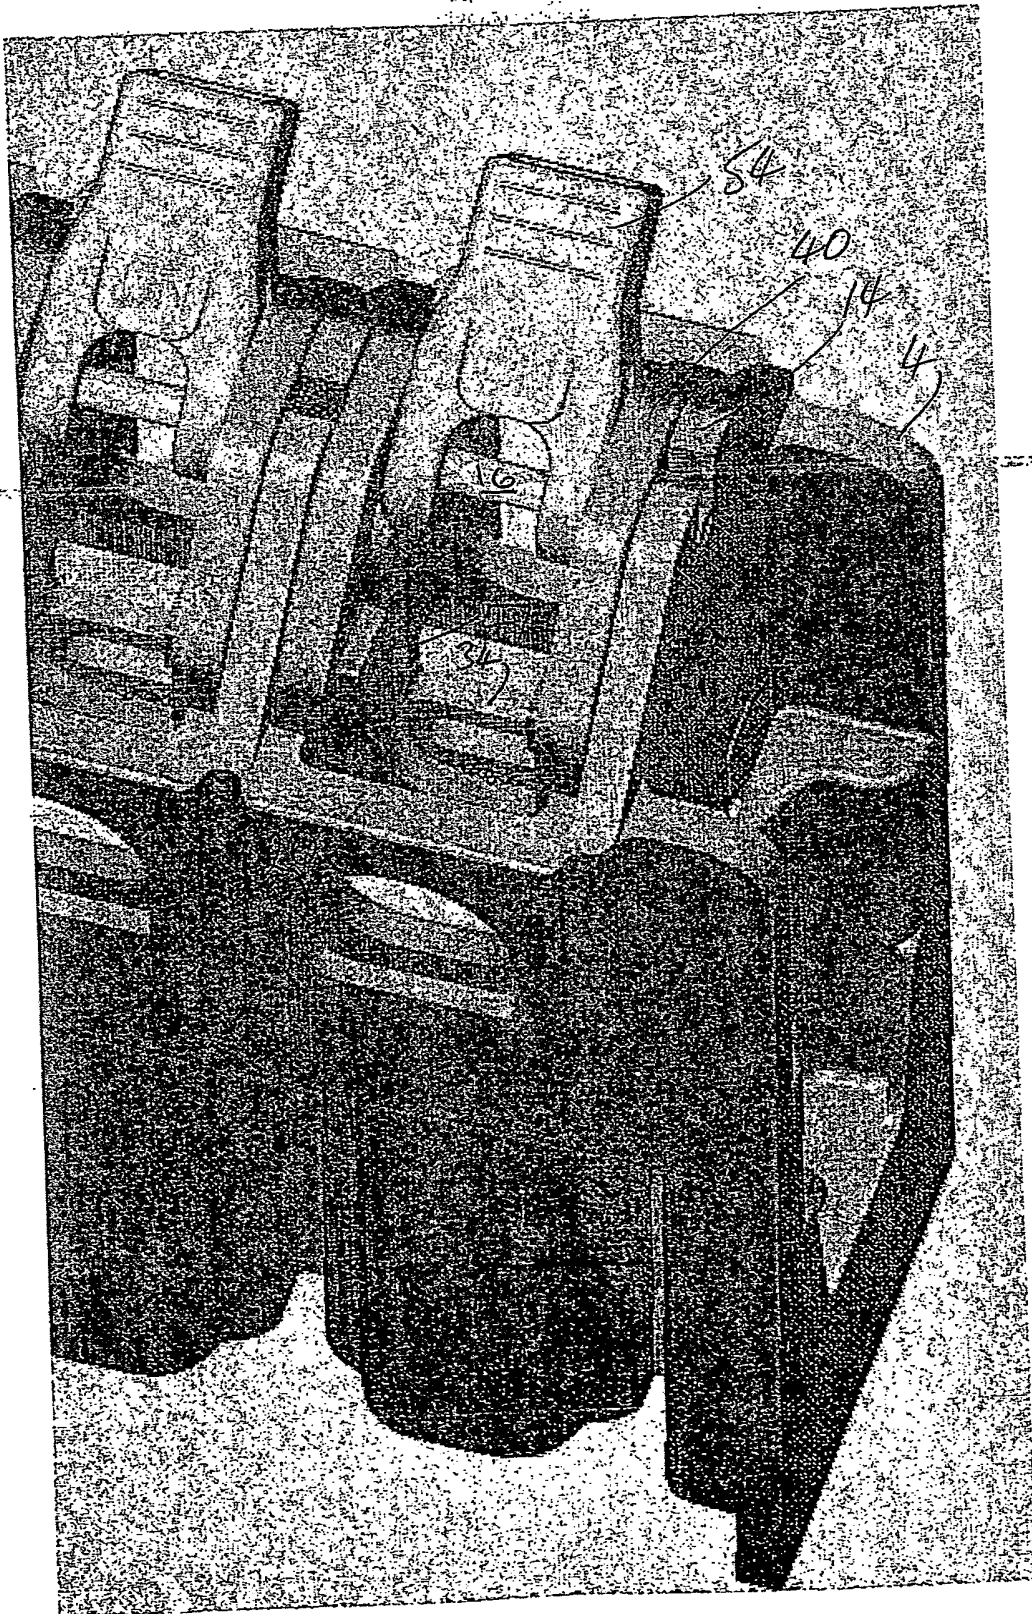


Figure 5



9/12

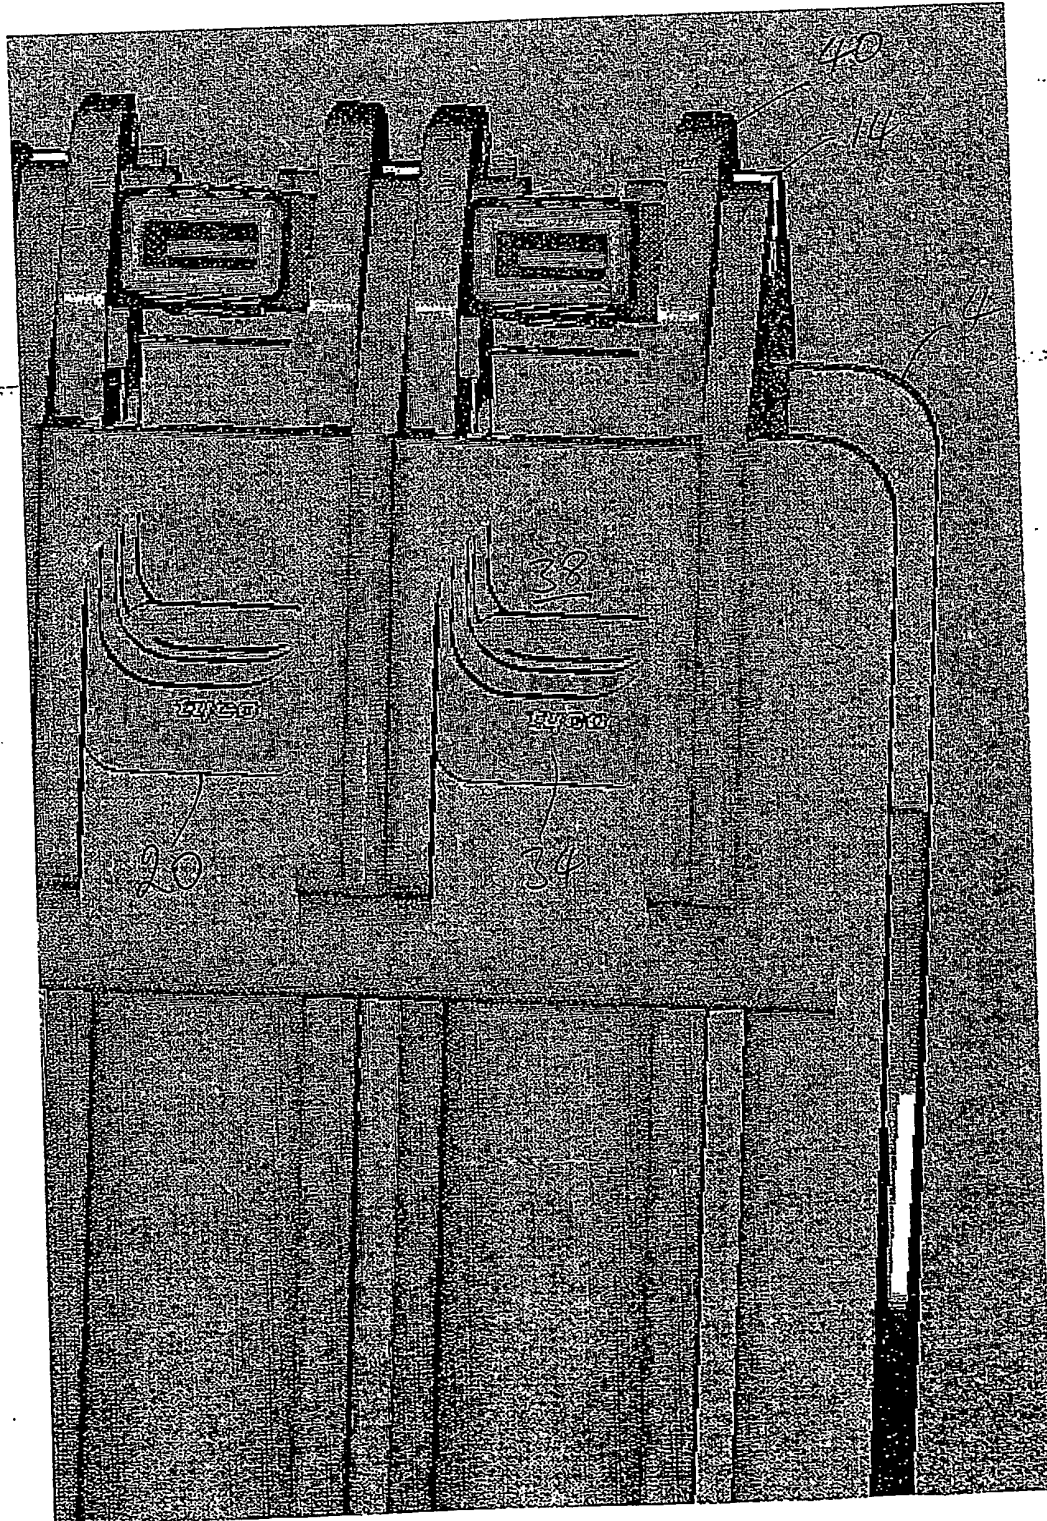


Figure 6

10/12

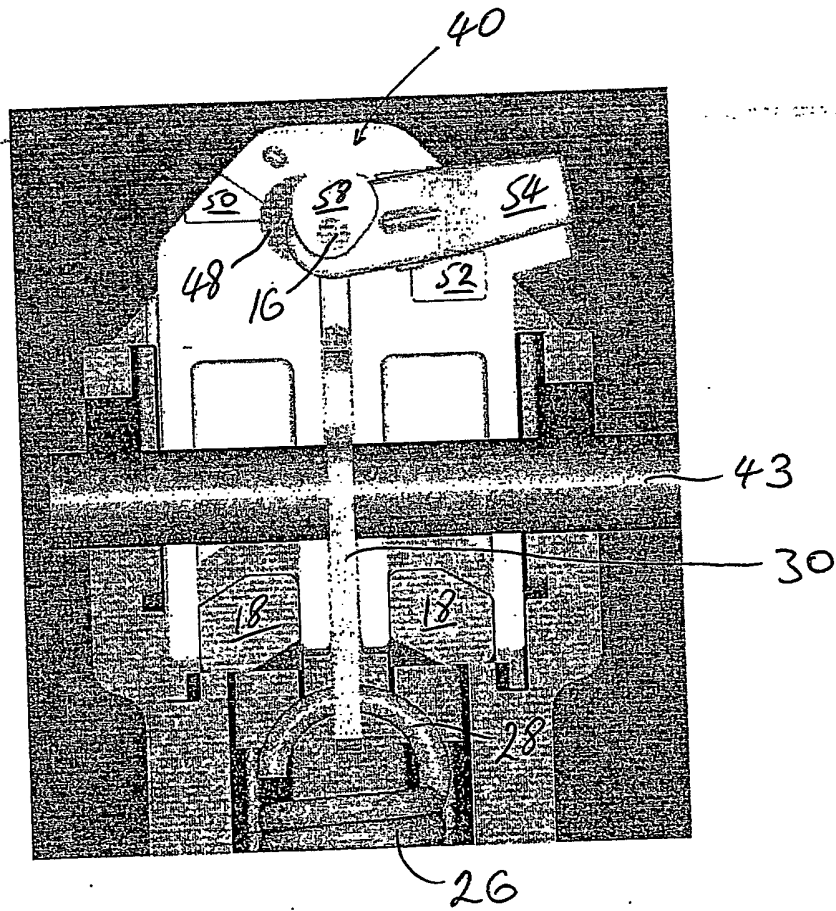


Figure 7

11/12

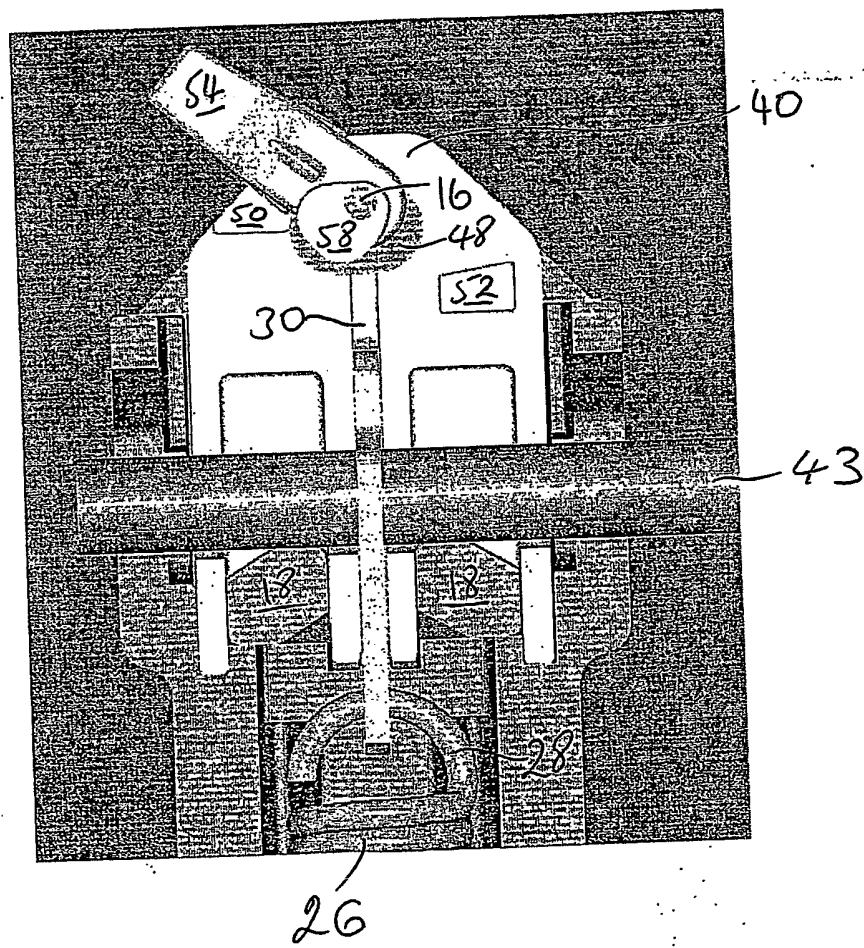


Figure 8

12/12

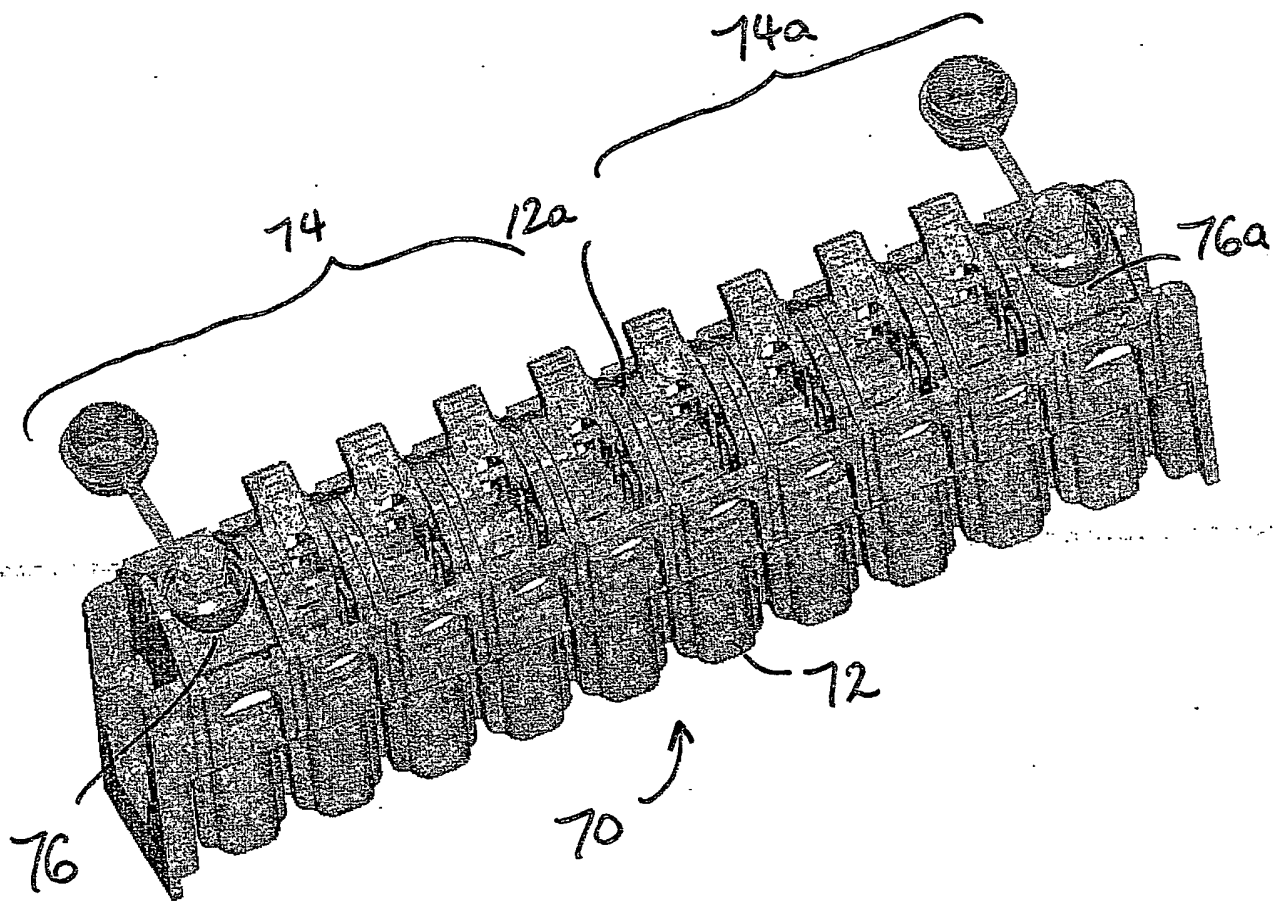


Figure 9.

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☒ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**